

Contents lists available at [ScienceDirect](#)

Composite Structures

journal homepage: www.elsevier.com/locate/compstruct

Optimal prestress design of composite cable-stayed bridges

F. Fabbrocino^a, M. Modano^b, I. Farina^c, G. Carpentieri^d, F. Fraternali^{d,*}^a Pegaso University, Department of Engineering, Piazza Trieste e Trento, 48, 80132 Naples, Italy^b Department of Civil Engineering, "Federico II" University of Naples, Via Claudio 21, 80125 Naples, Italy^c University of Naples Parthenope, Department of Engineering, Centro Direzionale di Napoli, isola C4, 80143 Naples, Italy^d Department of Civil Engineering, University of Salerno, Via Giovanni Paolo II 132, 84084 Fisciano (SA), Italy

ARTICLE INFO

Article history:

Received 23 July 2016

Accepted 5 September 2016

Available online xxx

Keywords:

Cable-stayed bridges

Composite bridges

Pre-stressing sequence

Force equilibrium method

Optimal bridge design

ABSTRACT

The present study considers the optimal pre-tensioning design of lattice structures forming composite cable-stayed bridges. With reference to a model problem, a target bending moment distribution over the longitudinal beams is identified, with the aim of achieving an optimized use of the material composing the bridge. Next, a procedure for the optimization of cable forces is developed, in order to achieve the desired bending moment distribution through the application of a self-equilibrated state of stress induced by optimal cable pre-tensioning. Results indicate that the given design approach is suitable for the optimization of the pre-tensioning sequence of arbitrary composite cable-stayed bridges.

© 2016 Elsevier Ltd. All rights reserved.

1. Introduction

The use of composite materials in long-span bridges is attracting increasing interest, as these materials exhibit higher stiffness-to-weight and strength-to-weight ratios compared with traditional structural materials. Composite materials are extremely lightweight and display extreme fatigue resistance and high durability in any type of environment. Unlike traditional technologies, their qualities also included speed of execution and complete reversibility. Other benefits include low energy consumption during manufacturing, construction and execution processes [1–6]. The use of hybrid Fiber Reinforced Polymer (FRP) cables in long-span cable-stayed bridges is an area of particular interest [7–12]. Their excellent durability means that composite materials also entail low maintenance costs. Such properties are very useful for extending the service life of bridge structures, as bridges are usually exposed to severe environmental conditions [13]. While the cost of composite materials is generally greater than that of traditional structural materials, the extended life of a composite structure results in reduced long-term structural costs. Low maintenance costs are one of the most important considerations in Bridge Life Cycle Cost Analysis (BLCCA).

Several examples of long-span cable-stayed bridges using composite materials have been developed in recent years, including Sutong Bridge (1088 m span) in China, Stonecutters Bridge (1018 m) in Hong Kong, and Tatara Bridge (890 m) in Japan [7]. The Sutong Bridge is a cable-stayed bridge with double-plane and twin-pylon. Two auxiliary piers and one transitional pier were erected in each side span. The main span of the bridge is 1088 m making it the world's longest main cable-stayed bridge span. The stay cables are arranged in double inclined cable planes and made of a parallel wire strands consisting of 7 mm wires. Other pedestrian and vehicular bridges have been constructed in the past using FRP cables, including Aberfeldy footbridge (UK, 1992 – one of the finest such examples), Herning Bridge (Denmark, 1999) and I-5/Gilman Bridge (USA, 2002), the latter being a composite cable-stayed bridge with an eccentric type pylon [8,9].

The construction of cable-stayed bridges is characterised by a series of phases in which geometry, boundaries, and loads vary significantly, causing changes in the state of stress [14–19]. The optimization of the construction process via the regulation of the initial forces in cables is important for the optimal control of the whole structural behaviour [20]. One of the most common problems when dealing with cable-stayed bridges concerns the computing of the initial cable forces and the pre-tensioning sequence, which are needed to obtain the designed configuration [21]. An optimal pre-tensioning sequence is useful for controlling stress and strain during and after the construction phases. The literature offers several different approaches [18,19], and the best solution remains an open issue. In fact, there are no closed form analytical solutions

* Corresponding author.

E-mail addresses: francesco.fabbrocino@unipegaso.it (F. Fabbrocino), modano@unina.it (M. Modano), ylenia.farina@gmail.com (I. Farina), gerardo_carpentieri@msn.com (G. Carpentieri), f.fraternali@unisa.it (F. Fraternali).

that allow for the computing of the pre-tensioning sequence given a final design configuration. Only iterative algorithms are available [18,19], although these require several cable tightening operations that lead to technological, structural, and economic problems.

The absence of closed form solutions is due to the large number of parameters in characterizing cable stress distribution in CSBs. The structural behaviour of CSBs depends on geometry, statics, material properties, construction process, and technology. The development of tools to control the behaviour of these structures is therefore an open issue.

The present work deals with the formulation of a procedure for the optimization of cable pre-tensioning forces that is suitable for any kind of CSBs. The proposed approach allows for the optimization of the bending moment distribution in the deck under relevant pre-tensioning force values. We employ the 'influence matrix method' to compute the optimal pre-tensioning sequence that guarantees the achievement of the designed bending moment distribution (BMD), which is statically equivalent to another target distribution.

The proposed procedure falls under the so-called 'force equilibrium methods' [20,22] methods that act directly on the internal forces and indirectly on the elastic deformations. It can be applied to any construction sequence and can be generalized to account for time-dependent phenomena [23]. It is worth noting that the overall structural system of a cable-bridge, which is composed of the

bridge deck, the supporting piers and the suspending cables, may be regarded as a composite lattice structure whose mechanical performance and structural weight can be profitably optimized by experimenting with different optimal design of cables' prestress.

2. Model problem

Our study refers to a composite-material re-design of the At Tannumah Bridge (ATB), which is a part of a highway viaduct connecting Basra city centre to the At Tannumah area in Iraq, passing over the Shatt al Arab River. The original design of such a bridge was developed by the Studio 'De Miranda Associati' in Milan, Italy.

The present bridge concept includes a semi-fan, a central suspended span, and a self-supported cable-stayed system (Fig. 1). In the longitudinal direction, the bridge's mid-span is symmetric. It includes two towers and two sets of cables. The deck is made of three spans – a central span of 150 m and two lateral spans of 75 m each. The deck is assembled from semi-precast elements with lengths of 12.50 m each. The towers are made of pre-built sections of reinforced high-strength concrete (class C45/55), as per Euro-code 2 [24].

In the original design, the deck is made of steel welded beams (class S355) [23] and a reinforced concrete slab (class C25/30) [23] of 26 cm thickness. The connection between the concrete slab

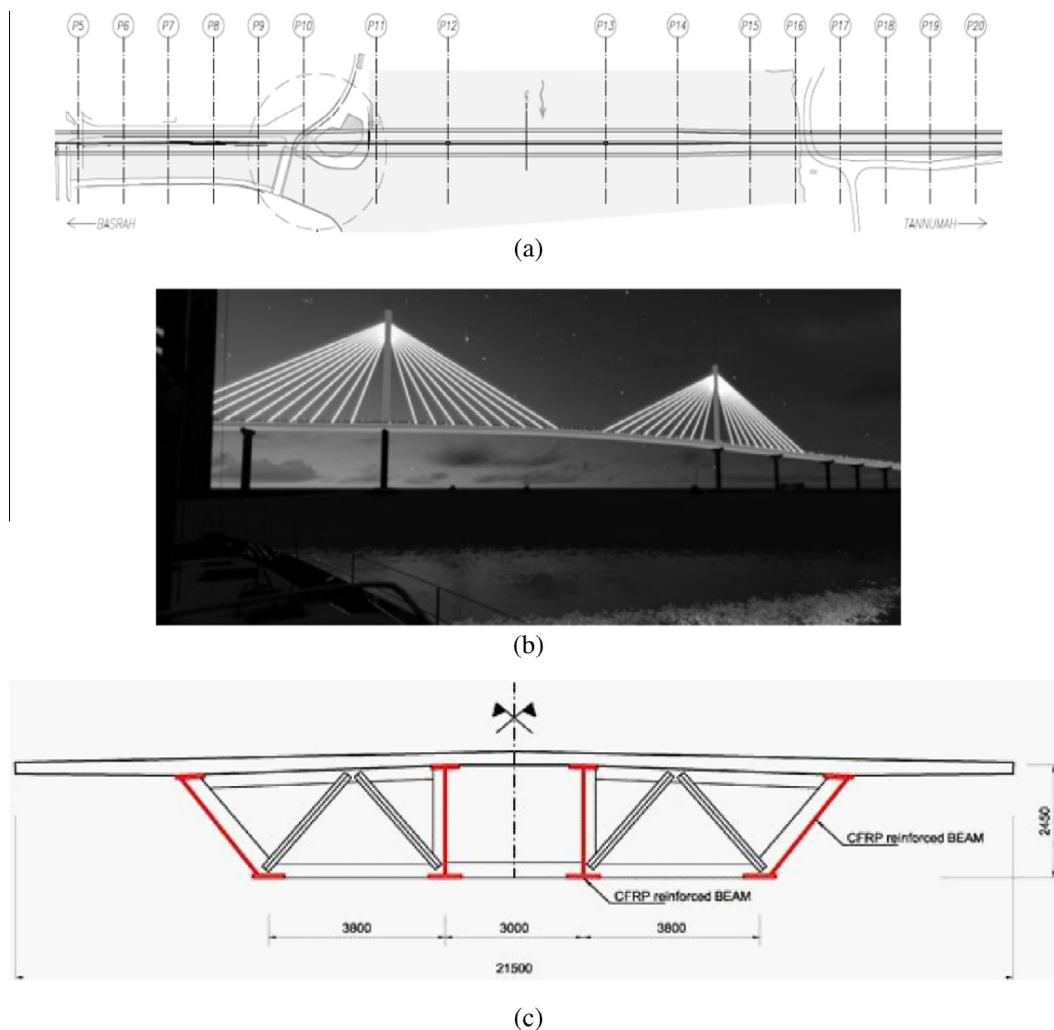


Fig. 1. The At Tannumah Bridge: (a) top view, (b) 3D view, (c) deck cross section [16] (courtesy of Studio 'De Miranda Associati', Milan, Italy).

and the steel beams is made with metallic bolts. The original S355 steel welded beams are replaced with S235 steel welded beams wrapped with Carbon Fiber Reinforced Polymer (CFRP) layers (Fig. 1c) in the present study. This composite redesign of the longitudinal beams uses a kind of steel (S235) with 1/3 strength, as compared with that used in the original ATB design (S335). The S235 steel is employed in such a way as to obtain overall strength and stiffness equal to those of the original S335 beams, under approximately the same weight (Fig. 1c). In this study, the steel cables of the original ATB design (cables with diameter of 22 cm made of a set of 110 braided steel wires with diameter of 16 mm each) are replaced with equivalent hybrid basalt and carbon cables (B/CFRP), using the principle of cable replacement given in [8]. In the new design, BFRP wires are arrayed in the centre of the cable, while hybrid B/CFRP wires are arrayed in the outer layer of the cable. A viscoelastic material is inserted in the gap between the center and outer layers [8].

Fig. 1 shows different views of the ATB, while Fig. 2 illustrates the layout of the structural model that we employed to describe such a bridge. The elastic problem of the CSB model in Fig. 2 has been solved by assuming a linear elastic response for all the bridge elements, using the numerical algorithm detailed in [19] and references therein.

Hereafter, we refer to the bridge model S_0 (Fig. 3a) that corresponds to assumed zero pre-tensioning forces in the cables (bridge unstressed under zero external loads) as ‘initial’. We shall see in the next section that such a model induces a highly non-uniform moment distribution over the longitudinal bridge axis, which is not ideal for the optimal use of the material (assuming uniform cross section of the deck along the span).

Similarly, we have named the realization S_d of the bridge model in Fig. 3(a) that corresponds to pre-tensioning forces inducing a bending moment distribution over the deck identical to that exhib-

ited by a low-stiffness re-design of the ATB deck (‘optimal’ bending moment distribution) as ‘optimal design’ [25]. The model deriving from a low stiffness re-design of the deck is hereafter referred to as ‘auxiliary’, and denoted by S_a (Fig. 3b).

It is shown in [25], where different alternative designs of the ATB are compared, the above optimal bending moment distribution is nearly uniform over the span, determining an optimized use of the material composing the deck. The proposed optimal design procedure allows us to obtain a target bending moment distribution through the application of a self-equilibrated state of stress induced by optimal cable pre-tensioning. Our final goal is to experiment with the pre-tensioning forces of the cables of the model in Fig. 2(a), in order to achieve on the real bridge the same bending moment distribution shown by the auxiliary bridge model S_a in Fig. 2(b).

3. Initial and optimal bending moment distributions

Figs. 4 and 5 show the bending moment and cable force distributions for the initial and auxiliary bridge models defined in the previous section. It is worth noting that the bending moment distribution over the longitudinal beams of the initial model (M_0) is rather non-uniform along the deck, featuring a peak value for the deck-pier junction that is more than five times larger than the moment at the middle of the span (Fig. 4a). In the same model, the axial force carried by the most-stressed cable (cable # 7) is 3.28 times larger than the axial force carried by cable # 1 (Fig. 4b).

The optimal bending moment distribution (M_d) is illustrated in Fig. 5, with M_d showing a much more uniform distribution over the span than M_0 (Fig. 4a).

As stated previously, M_0 was computed on the real model of the ATB prescribing zero pre-tensioning forces in all cables. Such moment distribution on the initial portions of the two branches

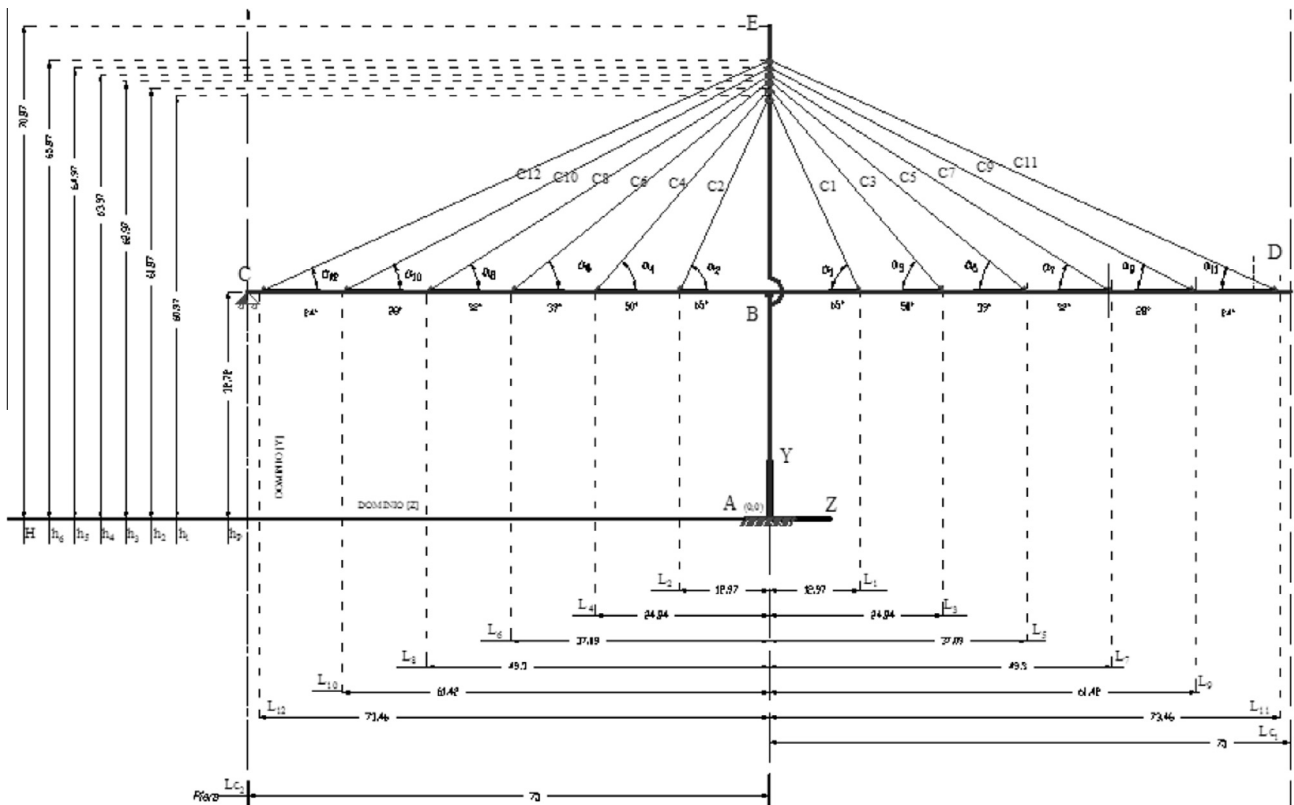


Fig. 2. Lattice structure of the adopted bridge model.

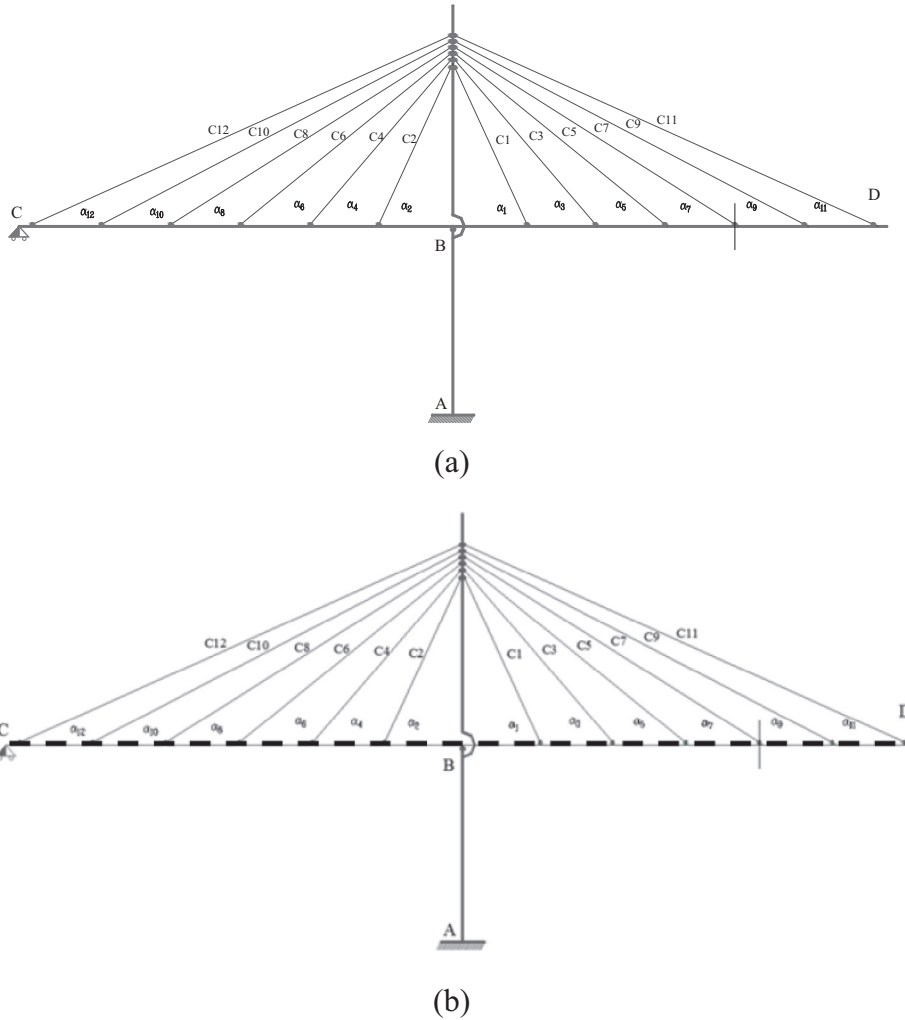


Fig. 3. (a) Initial bridge model S_0 , (b) auxiliary bridge model S_a . The dashed thick line indicates a low stiffness deck.

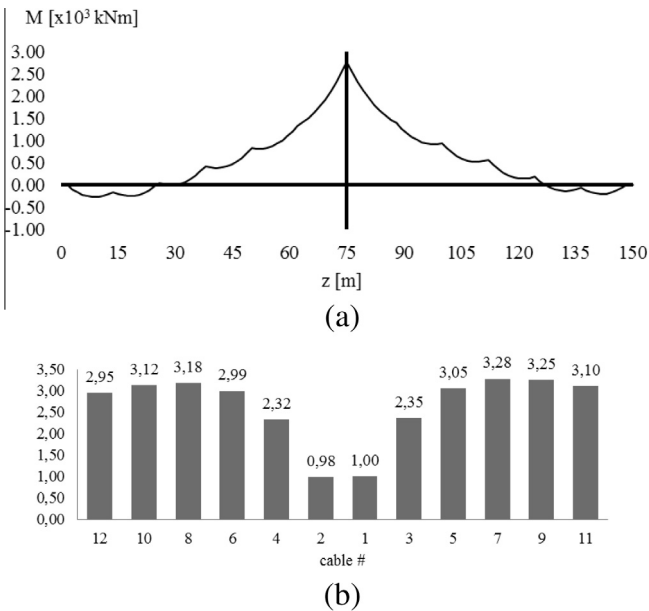


Fig. 4. (a) Bending moment distribution (M_0) and (b) normalized cable forces t_{0i} (divided by the axial force carried by cable #1 for the initial model (zero cable pre-tensions)).

departing from the central pier (Fig. 4a) resembles that of a cantilever beam under uniform transverse loading. The M_d bending moment distribution was instead computed on a auxiliary bridge model with a low-stiffness deck and zero cable pre-tensions [25]. Such moment distribution over the initial portions of longitudinal beams departing from the pier resembles that of a multi-support continuous beam under uniform transverse loading (Fig. 5). The goal of the following section is to show how one can get the bending moment distribution M_d over the real bridge model (Fig. 2a), by playing with a suitable cable pre-tensioning.

4. Algorithm for the computation of the optimal pre-tension forces

This section is devoted to the formulation of a pre-tensioning design of the S_0 model, which ensures that the bending moment distribution over the longitudinal beams corresponds to M_d (Fig. 5). Let $\mathbf{X} = \{x_1, \dots, x_n\}^T$ denote the vector collecting the pre-tensioning forces of all cables ($n = 12$). By repeatedly solving elastic problems of the bridge model in Fig. 2(a), we compute the axial force carried by the j -th cable when the i -th cable is subject to a unit axial force (S_i system). Let d_{ij} denote such a force coefficient, and let \mathbf{D} denote the $n \times n$ influence matrix collecting all such entries [25]. We are interested in solving the following linear problem [26]:

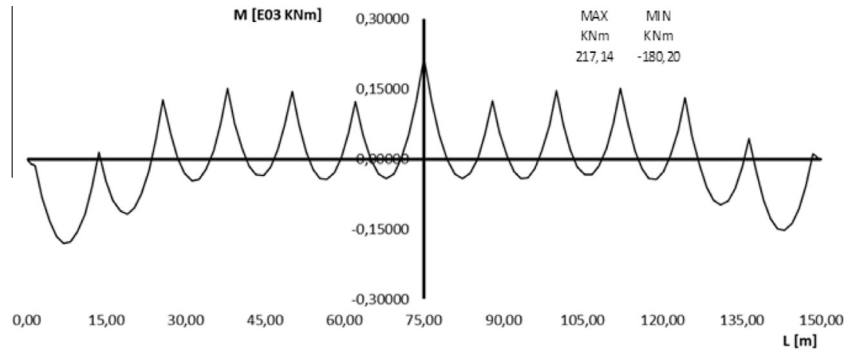


Fig. 5. Target bending moment distribution for the optimal model (M_d).

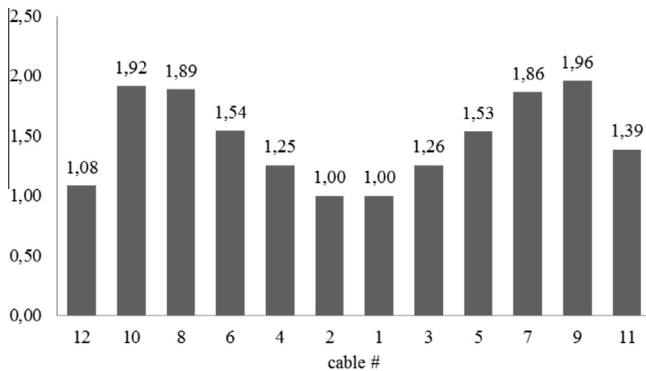


Fig. 6. Normalized cable forces t_{di} (divided by the axial force carried by cable #1) for the optimal model (including cable pre-tensions Δt_i).

$$D^T X = \Delta T \quad (1)$$

where $\Delta T = \{\Delta t_1, \dots, \Delta t_n\}^T$ is the vector with current entry $\Delta t_i = t_{di} - t_{0i}$, and t_{0i} denoting the forces in the i -th cable, respectively, in correspondence of the optimal design and in the initial models. The algebraic system of Eq. (1) is obtained by solving the $n + 2$ elastic systems $S_0, S_a, S_1, \dots, S_n$. Its solution allows us to determine the pre-tensioning forces Δt_i to be applied to the different cables in order to achieve the target bending moment distribution M_d (Fig. 6). The optimal cable force distribution illustrated in Fig. 6 shows a more uniform profile compared to that of the initial model (Fig. 4b), with a maximum cable force (in cable #9) that is 1.96 times larger than the force carried by cable #1.

5. Concluding remarks

We have presented an approach to the optimal pre-tensioning design of composite cable-stayed bridges whose aim is to achieve a target bending moment distribution over the deck. Such an approach allows designers to recover from construction errors that could compromise the structural safety of the bridge.

The proposed methodology is based on the matrix of influence method, and relies on the determination of the cable forces on $n+2$ elastic structural models, with n denoting the total number of cables. It can be applied to any construction phase and can be easily generalized to account for major dynamic effects (such as, e.g., wind and fluttering); time-dependent phenomena due, e.g., to material viscosity [23], and/or fracture damage [26]. Such a bridge design technique can also be applied to prestressed concrete structures, arch bridges with suspended decks, and tensegrity bridges [25,27,28]. Other fields of application of the current influence matrix approach include the study of the optimal prestress of

tensile reinforcements for existing masonry and concrete structures [22,29–33]; the optimal design of cable-stayed bridges using innovative concretes reinforced with 3D printed rebars [34–36]; and the optimal pre-tensioning of mechanical metamaterials to be used as novel seismic isolation devices [37,38].

Acknowledgements

The authors wish to acknowledge the valuable support of Maeg Costruzioni Spa, Treviso, Italy, and Studio 'De Miranda Associati', Milan, Italy, for the above research.

References

- [1] Dhand V, Mittal G, Rhee KY, Park SJ, Hui D. A short review on basalt fiber reinforced polymer composites. *Compos Part B Eng* 2015;73:166–80.
- [2] Son BJ, Lee SY, Ji HS. Long-term performance of a fiber-reinforced polymer slab bridge superstructure-field load test and ratings. *Compos Part B Eng* 2013;45(1):644–56.
- [3] Wang ZY, Wang QY. Fatigue strength of CFRP strengthened welded joints with corrugated steel plates. *Compos Part B Eng* 2015;72:30–9.
- [4] Stoll F, Saliba JE, Casper LE. Experimental study of CFRP-prestressed high-strength concrete bridge beams. *Compos Struct* 2000;49(2):191–200.
- [5] Caron JF, Julich S, Baverel O. Self-stressed bowstring footbridge in FRP. *Compos Struct* 2009;89(3):489–96.
- [6] Jean-Marie Berthelot, Mustapha Assarar, Youssef Sefrani, Abderrahim El Mahi. Damping analysis of composite materials and structures. *Compos Struct* 2008;85(3):189–204.
- [7] Wang X, Wu Z, Wu G, Zhu H, Zen F. Enhancement of basalt FRP by hybridization for long-span cable-stayed bridge. *Compos Part B Eng* 2013;44(1):184–92.
- [8] Wang X, Wu Z. Integrated high-performance thousand-metre scale cable-stayed bridge with hybrid FRP cables. *Compos Part B Eng* 2010;41(2):166–75.
- [9] Cai H, Aref AJ. On the design and optimization of hybrid carbon fiber reinforced polymer-steel cable system for cable-stayed bridges. *Compos Part B Eng* 2015;68:146–52.
- [10] Wang X, Wu Z. Evaluation of FRP and hybrid FRP cables for super long-span cable-stayed bridges. *Compos Struct* 2010;92(10):2582–90.
- [11] Wang X, Wu Z. Modal damping evaluation of hybrid FRP cable with smart dampers for long-span cable-stayed bridges. *Compos Struct* 2011;93(4):1231–8.
- [12] Wang X, Xu P, Wu Z, Shi J. A novel anchor method for multi-tendon FRP cable: concept and FE study. *Compos Struct* 2015;120:552–64.
- [13] Wu HC, Yan A. Time-dependent deterioration of FRP bridge deck under freeze/thaw conditions. *Compos Part B Eng* 2011;42(5):1226–32.
- [14] Wai-Fah Chen, Duan L. *Bridge Engineering Handbook*. Washington: CRC Press; 1999.
- [15] Gimsing NJ. *Cable supported bridges. Concepts and design*. John Wiley; 1997.
- [16] Schlaich MB. Erection of cable-stayed bridges having composite decks with precast concrete slabs. *J Bridge Eng ASCE* 2001;6(5):333–9.
- [17] Walther R, Houriet B, Isler W, Moia P, Klein JF. *Cable Stayed Bridges*. 2nd ed. Thomas Telford Publishing; 1999.
- [18] Wang PH, Tseng TC, Yang CG. Initial shape of cable-stayed bridges. *Comput Struct* 1993;46(6):1095–106.
- [19] Wang PH, Tang TY, Zheng HN. Analysis of cable-stayed bridges during construction by cantilever methods. *Comput Struct* 2004;82:329–46.
- [20] Chen DW, Au FTK, Tham LG, Lee PKK. Determination of initial cable force in prestressed concrete cable-stayed bridges for given design deck profiles using the force equilibrium method. *Comput Struct* 2000.
- [21] Freire AMS, Negrão JHO, Lopes AV. Geometrical nonlinearities on the static analysis of highly flexible steel cable-stayed bridges. *Comput Struct* 2006.

- [22] Carpentieri G, Fabbrocino F, De Piano M, Feo L, Fraternali F. Minimal mass design of strengthening techniques for planar and curved masonry structures. In: Proceedings of ECCOMAS Congress 2016 – European Congress on Computational Methods in Applied Sciences and Engineering, 5–10 JUNE 2016 Crete Island, Greece.
- [23] Arici M, Granata MF, Recupero A. The influence of time-dependent phenomena in segmental construction of concrete cable-stayed bridges. *Bridge Struct* 2011;7(4).
- [24] EN 1992-1-1:2004. Eurocode 2: Design of concrete structures – Part 1–2: General rules.
- [25] Maresca MR. Comparison of different design solutions for the At Tannum Bridge in Bassora (M.Sc. thesis). University of Naples “Federico II”; 2013 (in Italian).
- [26] Fraternali F. Free discontinuity finite element models in two-dimensions for in-plane crack problems. *Theor Appl Fract Mech* 2007;47:274–82.
- [27] Carpentieri G, Modano M., Fabbrocino F, Fraternali, F. Optimal design and dynamics of truss bridges. In: Proceedings of COMPDYN 2015–5th ECCOMAS Thematic Conference on Computational Methods in Structural Dynamics and Earthquake Engineering. p. 1731–40.
- [28] Carpentieri G, Skelton RE, Fraternali F. Minimum mass and optimal complexity of planar tensegrity bridges. *Int J Space Struct* 2015;30(3–4):221–44.
- [29] Fraternali F, Carpentieri G, Modano M, Fabbrocino F, Skelton RE. A tensegrity approach to the optimal reinforcement of masonry domes and vaults through fiber-reinforced composite materials. *Compos Struct* 2015;134:247–54.
- [30] Fabbrocino F, Farina I, Berardi VP, Ferreira AJM, Fraternali F. On the thrust surface of unreinforced and FRP-/FRCM-reinforced masonry domes. *Compos Part B Eng* 2015;83:297–305.
- [31] Carpentieri G, Modano M, Fabbrocino F, Feo L, Fraternali F. On a tensegrity approach to the minimal mass reinforcement of masonry structures with arbitrary shape. *Meccanica* 2016. <http://dx.doi.org/10.1007/s11012-016-0493-0>.
- [32] Carpentieri, G, Modano M, Fabbrocino F, Feo L, Fraternali F. On the optimal design of cable-stayed bridges. In: Proceedings of ECCOMAS Congress 2016 – European Congress on Computational Methods in Applied Sciences and Engineering, 5–10 JUNE 2016 Crete Island, Greece.
- [33] Bossio A, Fabbrocino F, Lignola GP, Prota A, Manfredi G. Simplified model for strengthening design of beam-column internal joints in Reinforced Concrete Frames. *Polymers* 2015;7(9):1732–54.
- [34] Farina I, Fabbrocino F, Carpentieri G, Modano M, Amendola A, Goodall R, et al. On the reinforcement of cement mortars through 3D printed polymeric and metallic fibers. *Compos Part B Eng* 2016;90:76–85.
- [35] Farina I, Fabbrocino F, Colangelo F, Feo L, Fraternali F. Surface roughness effects on the reinforcement of cement mortars through 3D printed metallic fibers. *Compos Part B Eng* 2016;99:305–11.
- [36] Fabbrocino F, Farina I, Amendola A, Feo L, Fraternali, F. Optimal design and additive manufacturing of novel reinforcing elements for composite materials. In: Proceedings of ECCOMAS Congress 2016 – European Congress on Computational Methods in Applied Sciences and Engineering, 5–10 JUNE 2016 Crete Island, Greece, No. 4544 (16 pages).
- [37] Modano M, Fabbrocino F, Gesualdo A, Matrone G, Farina I, Fraternali, F. On the forced vibration test by vibrodyne. In: Proceedings of COMPDYN 2015–5th ECCOMAS Thematic Conference on Computational Methods in Structural Dynamics and Earthquake Engineering, p. 209–217.
- [38] Amendola A, Fabbrocino F, Feo L, Fraternali F. Dependence of the mechanical properties of pentamode materials on the lattice microstructure. In: Proceedings of ECCOMAS Congress 2016 – European Congress on Computational Methods in Applied Sciences and Engineering, 5–10 JUNE 2016 Crete Island, Greece, No. 6004 (17 pages).